
## PEDK-6040A Plastic Rubber Paper 40W 50W 60W Mini Laser Engraver



## PERFECT LASER





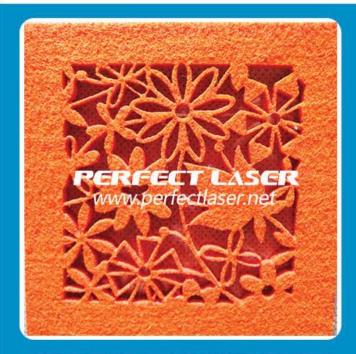







## PERFECT LASER



PEDK-6040A 40w CO2 laser engraver also called mini laser engraver is a economical and practical type with high precision engraving, optional electric-lifting work table for your choice.

Laser engraver is specially designed for craft engraving, mini laser engraver adopts imported component and most advanced photo-mechanic-electronic integration technology. The mini laser engraver makes sure the beautiful outlook, practical function and excellent performance.

Easy operation, and this kind of plastic engraver also can be used for a laser engraver for wood which can support printer and scanner, at mean time mini laser engraver is also compatible with ITF International standard word-bank, BMP, Jpg etc. file format.

With powerful edition software and strong compatibility, mini laser engraver can support many file format like BMP, PLT, AL, DST, DXF etc.



Applied Industry: Craft, Advertising decoration, Plexiglass, Rubber Plate, Mould, paper etc. industry.

Applied Material: Plexiglass, Acrylic, PVC, Leather, Textile, Cloth, Rubber, Plastic, Wood, Paper, Stone etc. non-metal materials. For its wide range application, we can also call it the 40w Co2 laser engraver,mini laser engraver,60w laser engraver plastic engraver,laser engraver for wood.

## PERFECT LASER



/ 1975-			
Item	PEDK-6040A		
Laser Type	Hermetic and Detached CO2 Laser Tube		
Laser Wavelength	10.64um		
Laser Power	40W	50W	60W
Working Area	600*400(mm)		
Engraving Speed	0-30000mm/min		
Cutting Speed	0-3600 mm/m	nin <b>F</b>	PERFECT LASER www.perfectlaser.net
Cutting Thickness	0-10mm (Varies to different materials)		
Machine Power	300-450W		
Location Type	Red Pointer positioning		
Location Accuracy	±0.1mm		
Resolution	1000dpi		
Port	USB 2.0		
Working Table	Honeycomb table		
Up-down height	0-300mm		
Mini Text Height	English Letter: 1mm Chinese:2mm		
Support Software	Windseal XP / CorelDraw		
Working Voltage	AC220v/50hz, AC110v/50hz		
Working Environment	Temperature: 0-45°C Humidity: 5%-95%		
Driver Way	Digital Subdividing Step Driver		
Laser Device Cooling Type	Circulating Water Cooling		
Option Item	Motorized lifting table, Rotary Fixture		
Rotary System(Optional)	φ10-150×300mm		
Machine Dimension	1020×700×600mm		
Machine Weight	95 kgs		

